


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C191337	2019/08/05	JC Chen	Dimensional tolerance change

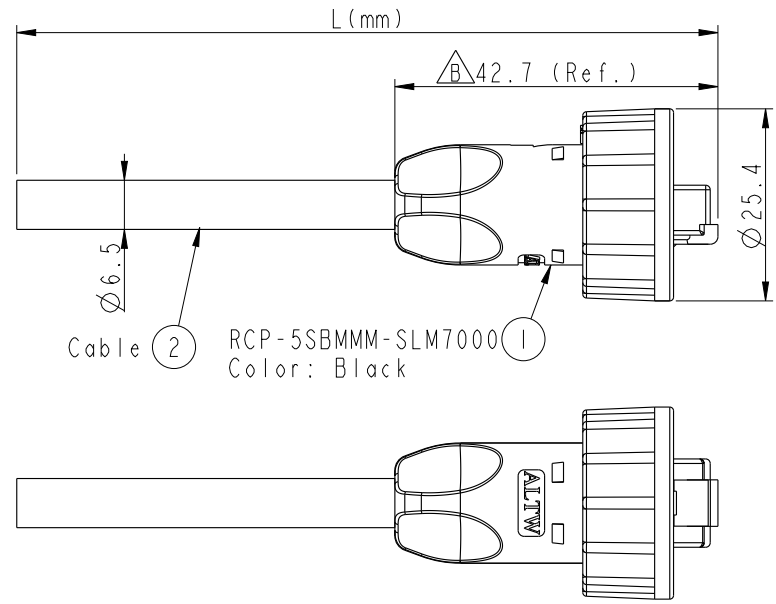

Cable ② RCP-5SBMMM-SLM7000
Color: Black

Drain Wire	接地線	Shield	
Brown	棕	8	Twist
White/Brown	白/棕	7	
Green	綠	6	Twist
White/Blue	白/藍	5	
Blue	藍	4	Twist
White/Green	白/綠	3	
Orange	橘	2	Twist
White/Orange	白/橘	1	
Wire Color		Plug	
Pin Out			

RCP-5SBMMM-SLM7BXX
T
XX: 01~99Meters
01: 01Meters
02: 02Meters
|
99: 99Meters
Cable Length(L):01~99Meters

- Note:
- * Ⓞ Important Dimension
 - * Waterproof Rate: IP67
 - * Plug: 8P8C, Gold Plated, Shielded
 - * Screw Nut: Nylon+GF, Black
 - * Cable: CAT5E FTP 24#*4P+D +Al/My(UV Resistant) OD=6.5mm, Black.
 - * Cable Length Tolerance:
 - 01M: ±40mm
 - 02~05M: ±60mm
 - 06~10M: ±100mm
 - 11~30M: ±200mm
 - 30~99M: ±500mm

UNIT:mm		
TOLERANCE		
.X	±0.25	
.XX	±0.1	
.XXX	±0.05	
ANGLES	±1°	

TITLE RJ45, C Size			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.3	Ⓞ: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY JC Chen	DATE 2019-08-05
DWG NO RCP-5SBMMM-SLM7BXX	CHECKED BY Li Feng	DATE 2019-08-05
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-08-05