


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION

1	2	3	4	5	6	7	8
F							
E							
D							
C							
B							
A							





Conn.1

Waterproof Rate: IP67

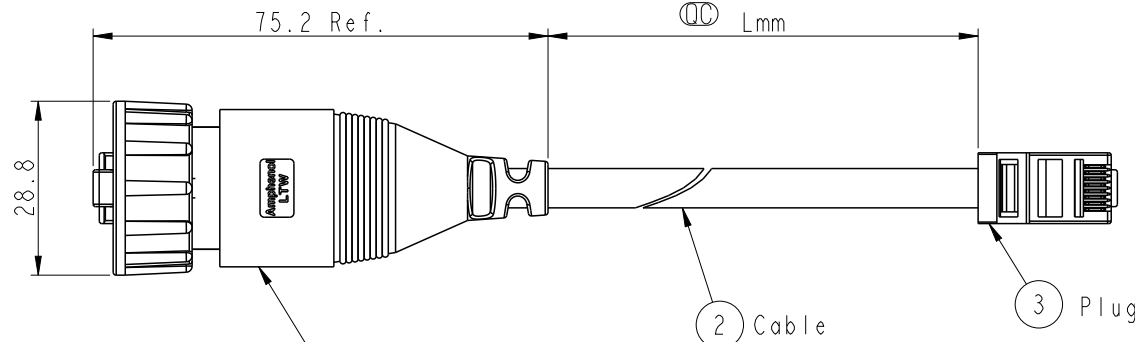

1 RDP-5SAMMM-TLM7000  
COLOR: BLACK



Conn.2



Shield	Drain Wire	Shield
8	Brown 棕	8
7	White/Brown 白/棕	7
6	Green 綠	6
5	White/Blue 白/藍	5
4	Blue 藍	4
3	White/Green 白/綠	3
2	Orange 橘	2
1	White/Orange 白/橘	1
Conn.1	Wire Color	Conn.2

Pin Out

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE RJ DOUBLE-ENDED,WITH PLUG			
SCALE 4:5	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. A.1	QC: Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Raison_liao	DATE 2013-07-20
DWG NO RDP5SM-SPG06M-TL7BXX	CHECKED BY Tony	DATE 2013-07-20
CUSTOMER ALTW	APPROVED BY Victor	DATE 2013-07-20

RDP5SM-SPG06M-TL7B XX  
XX : 01~99Meters  
01 : 01Meter  
02 : 02Meters  
:  
99 : 99Meters  
Cable Length(L):01~99Meters

- Note:
- \* (QC) Important Dimention To Check
  - \* Waterproof Rate: IP67
  - \* Housing: Nylon+GF, Black
  - \* Lock Nut: Nylon+GF, Black
  - \* RJ Plug: Shield,Phosphor Bronze, Gold Plated
  - \* Cable: CAT5E FTP 24#\*4P+D+AL/MY,6.5
  - \* Cable Length Tolerance: 01M:±40mm  
02M~05M:±60mm  
11M~30M:±200mm  
31M~99M:±500mm