
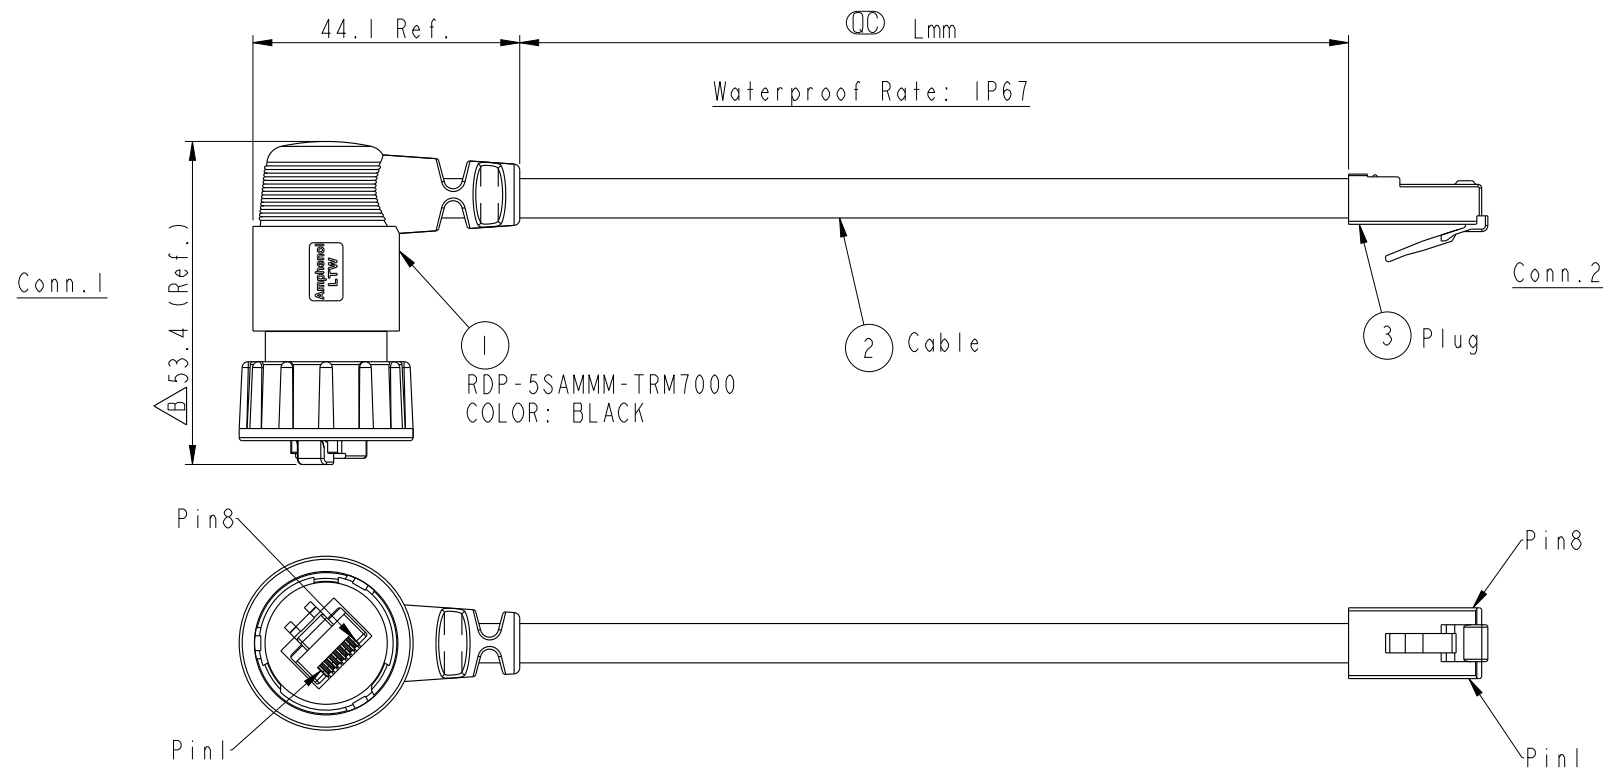


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C191686	2019/09/25	JC Chen	Dimensional tolerance change



RDP5SM-SPG06M-TR7B XX
XX : 01~99Meters
01 : 01Meter
02 : 02Meters
...
99 : 99Meters
Cable Length(L): 01~99Meters

- Note:
- * (QC) Important Dimension To Check
 - * Waterproof Rate: IP67 (Mating)
 - * Housing: Nylon+GF, Black
 - * Lock Nut: Nylon+GF, Black
 - * RJ Plug: Shield, Phosphor Bronze, Gold Plated
 - * Cable: CAT5E FTP 24#*4P+D+AL/MY, 6.5
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
11M~30M: ±200mm
31M~99M: ±500mm

Shield	Drain Wire	接地線	Shield
8	Brown	棕	8
7	White/Brown	白/棕	7
6	Green	綠	6
5	White/Blue	白/藍	5
4	Blue	藍	4
3	White/Green	白/綠	3
2	Orange	橘	2
1	White/Orange	白/橘	1
Conn. 1	Wire Color		Conn. 2

UNIT: mm		TITLE	RJ DOUBLE-90 ENDED, WITH CONN D SIZE, 3KEY LOCK
TOLERANCE		SCALE	4:5
.X ±0.25		SIZE	A4
.XX ±0.1		SHEET	1 OF 1
.XXX ±0.05		REV.	B
ANGLES ±1°		WC-REV.	A.1
		(QC)	Inspection item

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	RDP5SM-SPG06M-TR7BXX	ALTW	JC Chen	Li Feng	Jerry	2019-09-25