


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2021-08-27	Allen Pan	Rev.02 To Rev.A
B	C230091	2023-02-02	Ruru	$\triangle B$ X2

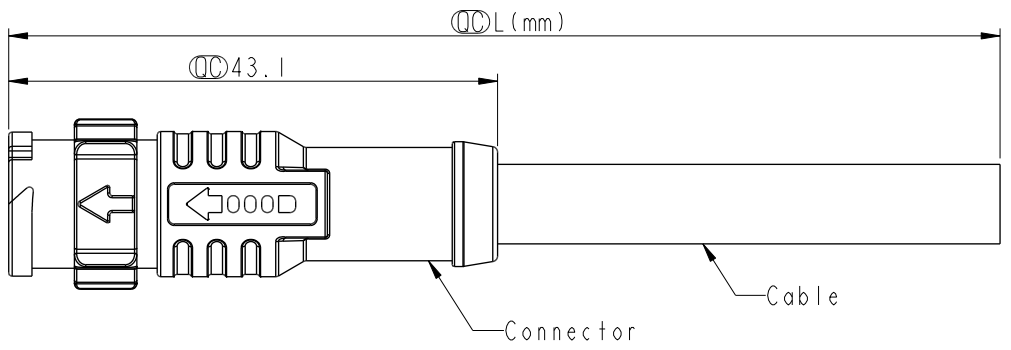

AD-XXBMMM-QL8PXX


XX:No. Of Pin

XX:01~15Meters  
 01:01Meter  
 02:02Meters  
 ...  
 15:15Meters

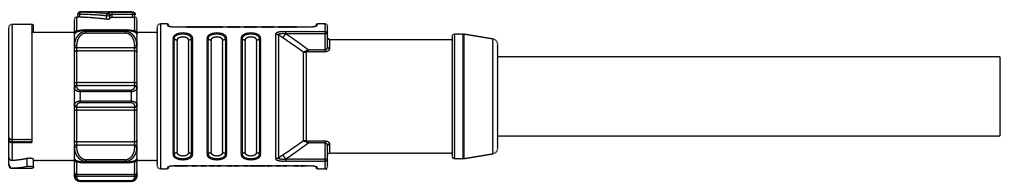

Note:


- \* RoHS Compliant
- \*  $\text{\textcircled{C}}$  Important Dimension
- $\triangle B$  \* Waterproof Rate: IP68, Mated 1m/24h
- \* Connector  
 Housing: Thermoplastic, Black  
 Pin: Copper Alloy, Gold Plated  
 Outer Mold: Thermoplastic, Black
- \* Cable: IEC61156-12, 26#IP+AL/MY+B, OD=3.8mm, PUR Jacket, Green
- \* Cable Length Tolerance: 1M: +50/-0 mm  
 1M < L ≤ 3M: +100/-0 mm  
 3M < L ≤ 5M: +150/-0 mm  
 5M < L ≤ 10M: ±100 mm  
 10M < L ≤ 15M: ±200 mm



2Pin

3	White	白
1	Blue	藍
Pin#	Wire	

Pin Assignments  
Front View

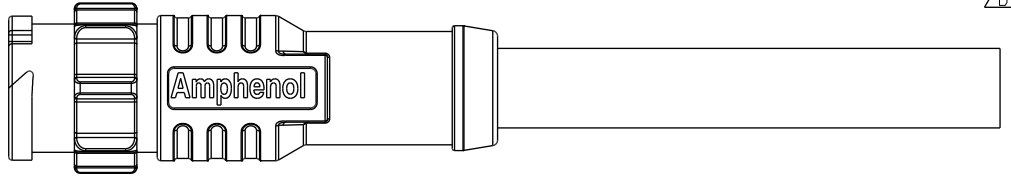

UNIT:mm

TOLERANCE

±0.5mm

TITLE XLOK, A-5A, CABLE W/O SR M, M, MOLDING, PUSH LOCK $\triangle B$			
SCALE 3:2	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.1	$\text{\textcircled{C}}$ : Inspection item	

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Allen Pan	DATE 2021-08-27
DWG NO. AD-XXBMMM-QL8PXX	CHECKED BY Sam Ho	DATE 2021-08-27
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2021-08-27