



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN15C0082	2015-12-01	Spring	update SR and note
C	LE31670036	2016-06-15	Tom_Gu	Change Part No. of Half Finished


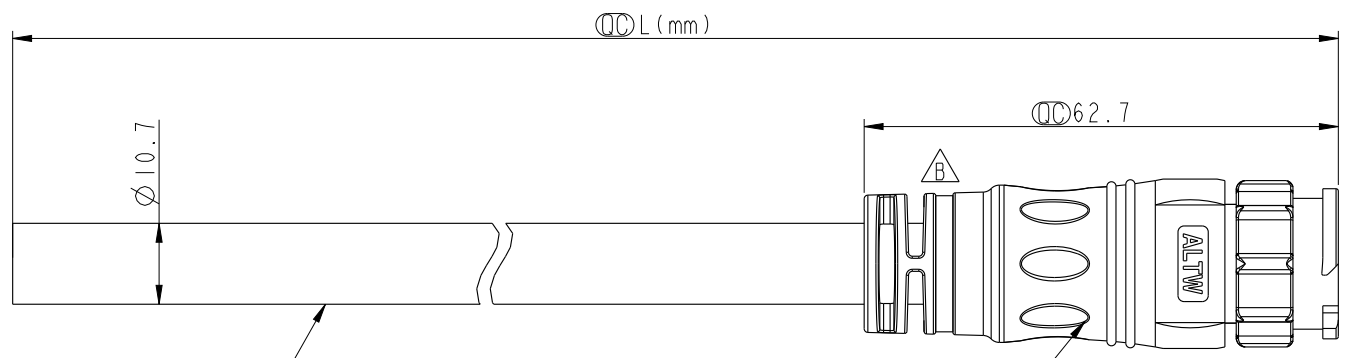


Cable ②

△ CC-02AMMM-QL8W0P ①
Color: Black

CC-02AMMM-QL8EXX
 ↑
 XX : 01~99Meters
 01 : 01Meter
 02 : 02Meters
 :
 :
 99 : 99Meters

- Note:
- * Ⓞ Important Dimension To Check.
 - * Working Voltage Rating: AC 300V
 - * Working Current Rating: 20A
 - * Waterproof Rate: IP68(Mated)
(in 1 meter water within 24 hours)
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: SJTW 12AWG*2C, Black
PVC Jacket, OD=10.7mm.
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

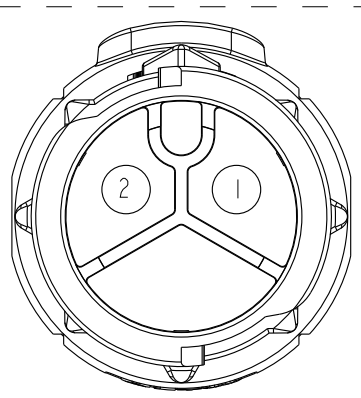

Pin Assignments
Front View

2	White	白
1	Black	黑
Conn.	Wire Color	
	Pin Out	

UNIT:mm				TITLE X Lok C-Size Cable 2 Pin 20A M Conn. M Pin			
TOLERANCE ±0.5				SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. C		WC-REV. A.2		④: Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Tom_Gu	DATE 2016-06-15
DWG NO CC-02AMMM-QL8EXX	CHECKED BY Spring_Liu	DATE 2016-06-15
CUSTOMER ALTW	APPROVED BY Kevin_Hu	DATE 2016-06-15

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.