



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

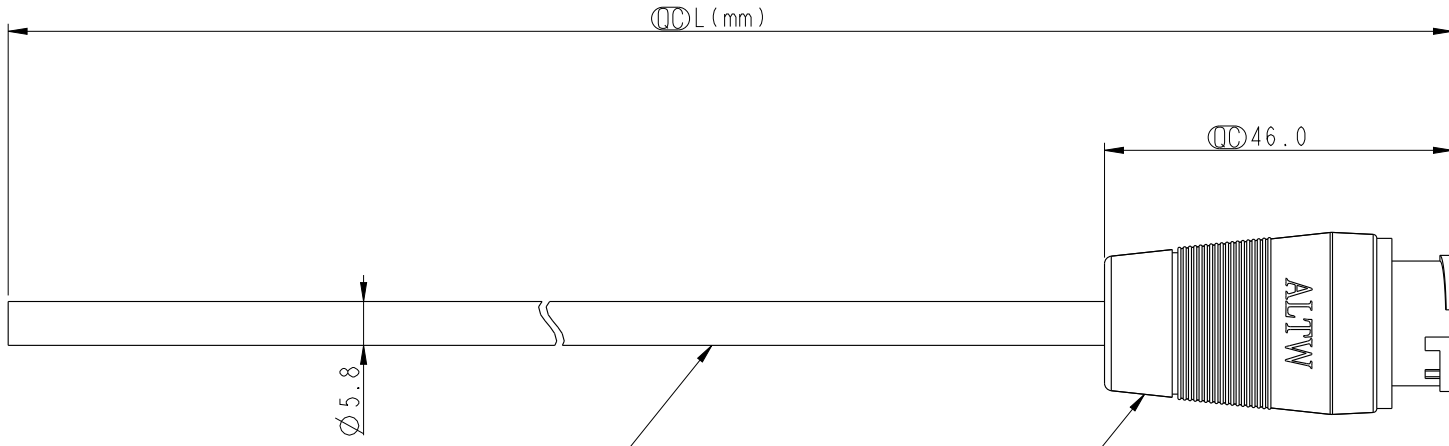

Conn

Cable ②


ICD-07BMMM-LL6000 ①  
Color: Black

ICD-07AMMM-LL7AXX

XX: 01~99Meters  
01: 01Meter  
02: 02Meters  
:


XX: 99Meters

Cable Length(L): 01~99Meters



Note:

- \* Ⓞ Important Dimension To Check
- \* Waterproof Rate: IP66
- \* Housing: Nylon+GF, Black
- \* Male Pin: Copper Alloy, Gold Plated
- \* Cable: UL2464 24AWG\*7C+Drain+AL/My PVC Jacket UV Resistant, OD5.8, Black.
- \* Cable Length Tolerance: 01M: ±40mm  
02M~05M: ±60mm  
06M~10M: ±100mm  
11M~30M: ±200mm  
31M~99M: ±500mm

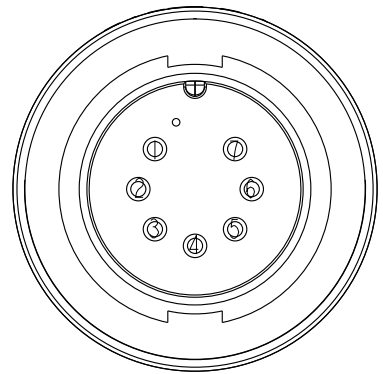

Pin Assignments  
Front View

7	White	白
6	Green	綠
5	Brown	棕
4	Red	紅
3	Yellow	黃
2	Orange	橘
1	Blue	藍
Conn.	Wire Color	
	Pin Out	

UNIT:mm		
TOLERANCE	±0.5	

TITLE Middle CNC PIN CABLE LOCK 7 PIN M CONN M PIN		
SCALE 1:1	SIZE A4	SHEET 1 OF 1
REV. A	WC-REV. A.3	Ⓞ: Inspection item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Laurence_zang	DATE 2013-12-25
DWG NO ICD-07BMMM-LL6AXX	CHECKED BY Lin Ren Song	DATE 2013-12-25
CUSTOMER ALTW	APPROVED BY Victor	DATE 2013-12-25