
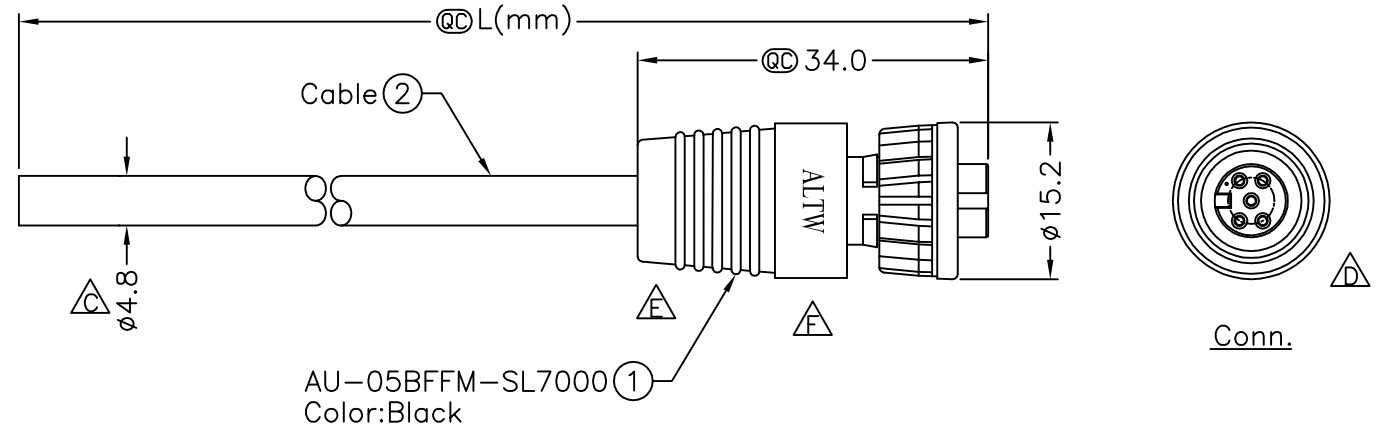



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN-0C0310~313	2010/11/26	Ivan Lin	Change View & Frame.
E	LEN1110591~594	2011/01/18	Vicky	Mini Size Molding 外觀變更
F	LEN15C0368~371	2015/12/08	Ruru	Change Logo




AU-05BFFM-SL7000 (1)  
Color: Black

AU-05BFFM-SL7AXX

- XX:01~99Meters
- 01:01Meter
- 02:02Meters
- :
- :
- 99:99Meters

Cable Length(L):01~99Meters

- Note:
- \* @@Important Dimension.
  - \* Waterproof Rate: I P67.
  - \* Connector: Nylon+GF, Black.
  - \* Female Pin: Copper Alloy, Gold Plated.
  - \* Screw Nut: Nylon+GF, Black.
  - \* O-Ring: EPDM, Black.
  - \* Cable: UL2464 26AWG\*5C+D+A, PVC Jacket, UV Resistant, OD=4.8mm, Black.
  - \* Cable Length Tolerance:
    - 01M:±40mm
    - 02M~05M:±60mm
    - 06M~10M:±100mm
    - 11M~30M:±200mm
    - 31M~99M:±500mm

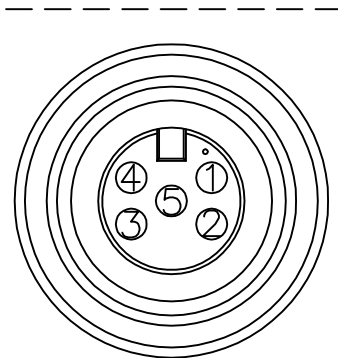

Pin Assignments  
Front View

5	Yellow	黃
4	White	白
3	Red	紅
2	Brown	棕
1	Green	綠
Conn.	Wire Color	
	Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Mini,Cable Screw 5P F Conn F Pin	
SCALE Free	SHEET 1 OF 1
REV. F	SIZE A4
QC :Inspection Item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2015/12/08
DWG NO AU-05BFFM-SL7AXX	CHECKED BY Rita	DATE 2015/12/08
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2015/12/08

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.