



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1660189~192	2016/05/30	Ruru	Change Logo & Note

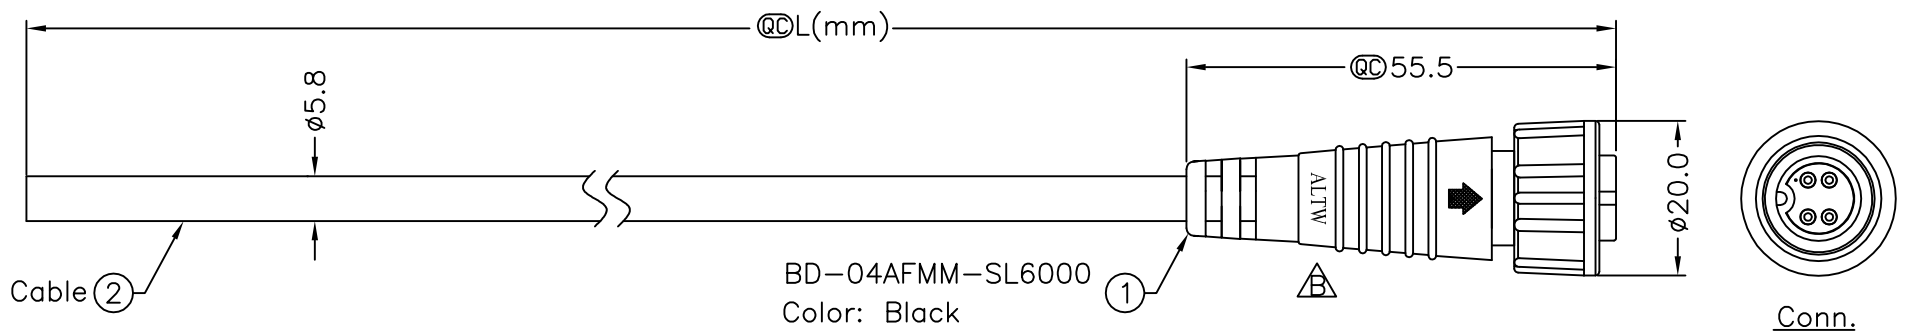


BD-04AFMM-SL6000
Color: Black

BD-04AFMM-SL6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*4C+Drain+Al/My, PVC Jacket UV Resistant, OD=5.8mm, Black
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

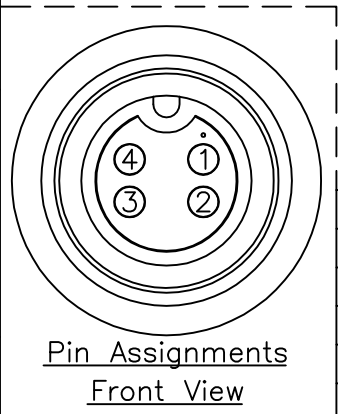

4	Yellow
3	Red
2	Green
1	White
Conn.	Wire Color
Pin Out	

UNIT:mm		TITLE	Standard		ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5 mm	Cable Screw 4Pin F Conn M Pin		Amphenol LTW	BD-04AFMM-SL6AXX	Ruru	2016/05/30
SCALE		Free	SHEET	1 OF 1	CUSTOMER	CHECKED BY	DATE
REV.		B	SIZE	A4	ALTW	Rita	2016/05/30
			@C	:Inspection Item		APPROVED BY	DATE
						Lisa	2016/05/30
1	2	3	4	5	6	7	8

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.