




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Release	2013-03-18	Kevin Wang	

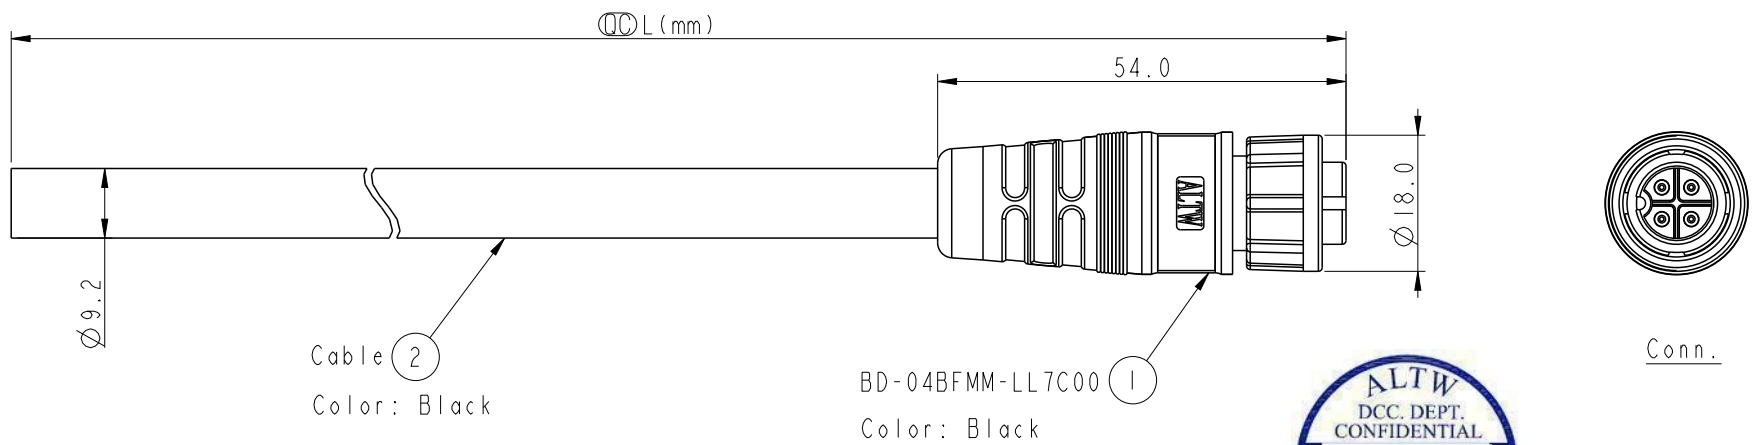


Cable ②  
Color: Black

BD-04BFMM-LL7C00 ①  
Color: Black



Pin Assignments  
Front View



4	Red	紅
3	Green	綠
2	White	白
1	Black	黑
Conn.	Wire Color	
Pin Out		

BD-04BFMM-LL7CXX

XX : 01~99Meters  
01 : 01Meter  
02 : 02Meters  
:  
:  
99 : 99Meters

Cable Length(L): 01~99Meters

Note:

- \* ① Important Dimension To Check.
- \* Waterproof Rate: IP67
- \* Housing: M-PPE, Black.
- \* Male Pin: Copper Alloy, Gold Plated.
- \* Lock Nut: Nylon+GF, Black.
- \* O-Ring: Silicon, Gray.
- \* Cable: TC-ER 18AWG\*4C+Filler, PVC Jacket, UV Resistant, OD=9.2mm, Black.
- \* Working Voltage Rating: 300V AC
- \* Working Current Rating: 5A
- \* Withstanding Voltage: 6KV
- \* Cable Length Tolerance: 01M:±40mm  
02M~05M:±60mm  
11M~30M:±200mm  
31M~99M:±500mm

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE STANDARD CABLE LOCK 4P F CONN M PIN			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. A.4	①: Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Kevin	DATE 2013-03-18
DWG NO BD-04BFMM-LL7CXX	CHECKED BY Micky	DATE 2013-03-18
CUSTOMER ALTW	APPROVED BY Maslow	DATE 2013-03-18