




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1530207~210	2014/12/18	Ruru	Change Logo

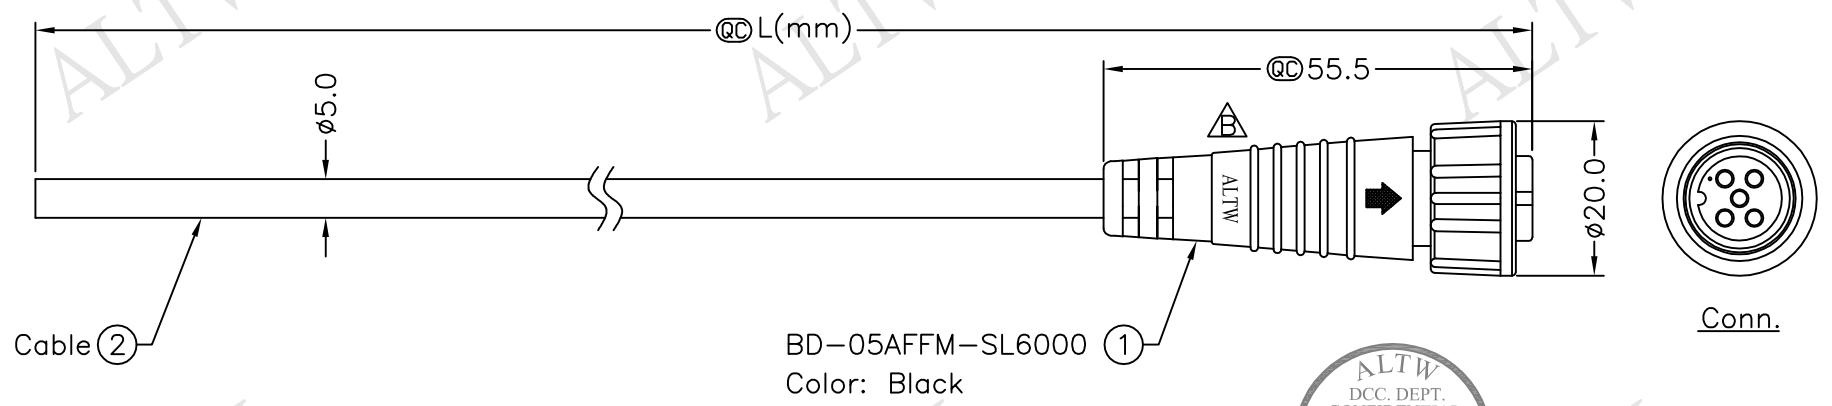

BD-05AFFM-SL6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*5C+D+Al/My PVC Jacket (UV Resistant) OD=5.0, Black
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm



Pin Assignments
Front View

5	Green
4	White
3	Black
2	Blue
1	Brown
Conn.	Wire Color
Pin Out	

UNIT:mm		TITLE	Standard	ITEM NO	DRAWN BY	Ruru	DATE	2014/12/18	
TOLERANCE	±0.5 mm	Cable Screw 5Pin F Conn. F Pin	Amphenol LTW	DWG NO	CHECKED BY	Rita	DATE	2014/12/18	
		SCALE	Free	SHEET	1 OF 1	APPROVED BY	Win	DATE	2014/12/18
REV.	B	SIZE	A4	QC	:Inspection Item	CUSTOMER	ALTW		

Amphenol LTW
 安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.