

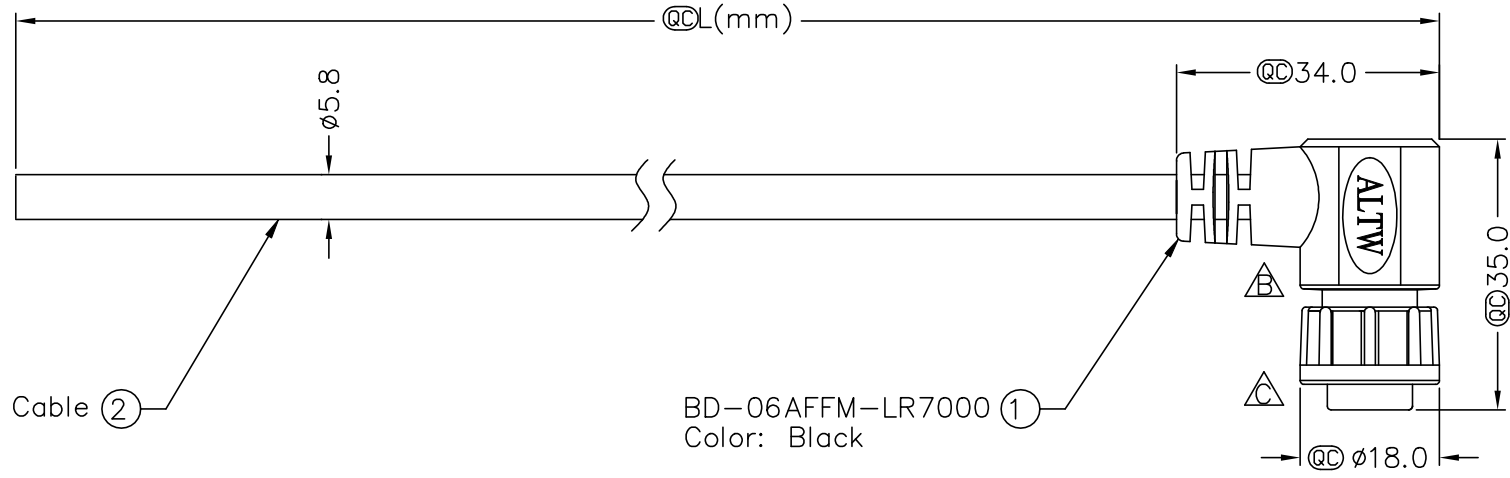


REV	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1620085~088	2016/01/08	Ruru	Change Logo & Note
C	C230042	2023/01/10	Ruru	△ X4



△ BD-06AFFM-LR7AXX
 ↑
 XX: 01~99Meter
 01: 01Meter
 02: 02Meters
 :
 :
 99: 99Meters

Cable Length(L): 01~99Meters



Pin Assignments
Front View

6	White
5	Red
4	Orange
3	Yellow
2	Green
1	Blue
Conn.	Wire Color
	Pin Out

- Notes:
- * @C Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*6C+Drain+Al/My, Black PVC Jacket UV Resistant, OD=5.8
 - △* Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

UNIT: mm	TOLERANCE ±0.5 mm	TITLE CERES, B-5A, 06P, CABLE W/SR F, F, MOLDING, 2LOCK △	Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ruru	DATE 2016/01/08
SCALE Free	SHEET 1 OF 1	REV. C	SIZE A4	DWG NO BD-06AFFM-LR7AXX	CHECKED BY Rita	DATE 2016/01/08
	@C : Inspection Item			CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/01/08

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.