




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1190189~192	2011/08/29	Jiang Jun Hua	Change SR View
C	LEN1620098~101	2016/01/08	Ruru	Change Logo

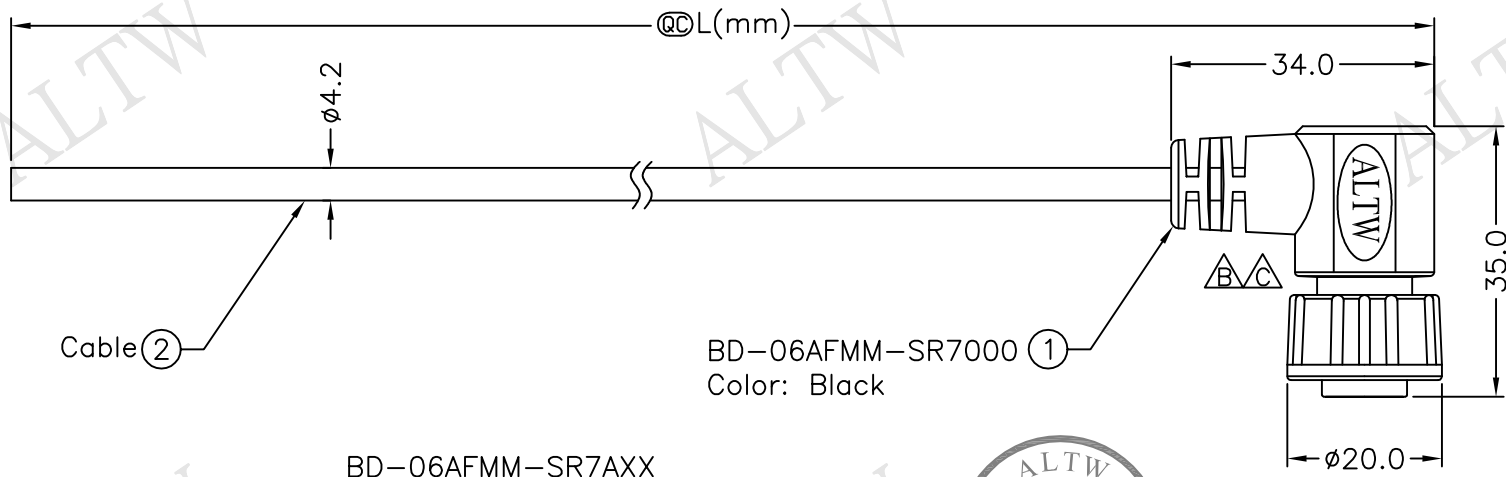

Cable ②

BD-06AFMM-SR7000 ①
Color: Black

BD-06AFMM-SR7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



Pin Assignments
Front View

Red	紅	2	△
Black	黑	1	
Wire Color		Conn.	
Pin Out			

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: Black, UL2464 24AWG*6C+Drain+Al/My PVC Jacket UV Resistant, OD=5.8mm
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard Cable Screw 6Pin F Conn M Pin		
SCALE	Free	SHEET	1 OF 1
REV.	C	SIZE	A4
QC : Inspection Item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Ruru	2016/01/08
BD-06AFMM-SR7AXX	Rita	2016/01/08
ALTW	Lisa	2016/01/08

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.