




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0677~681	2010/11/26	Ivan	Change View
C	LEN15C0450~454	2015/12/14	Ruru	Change Logo

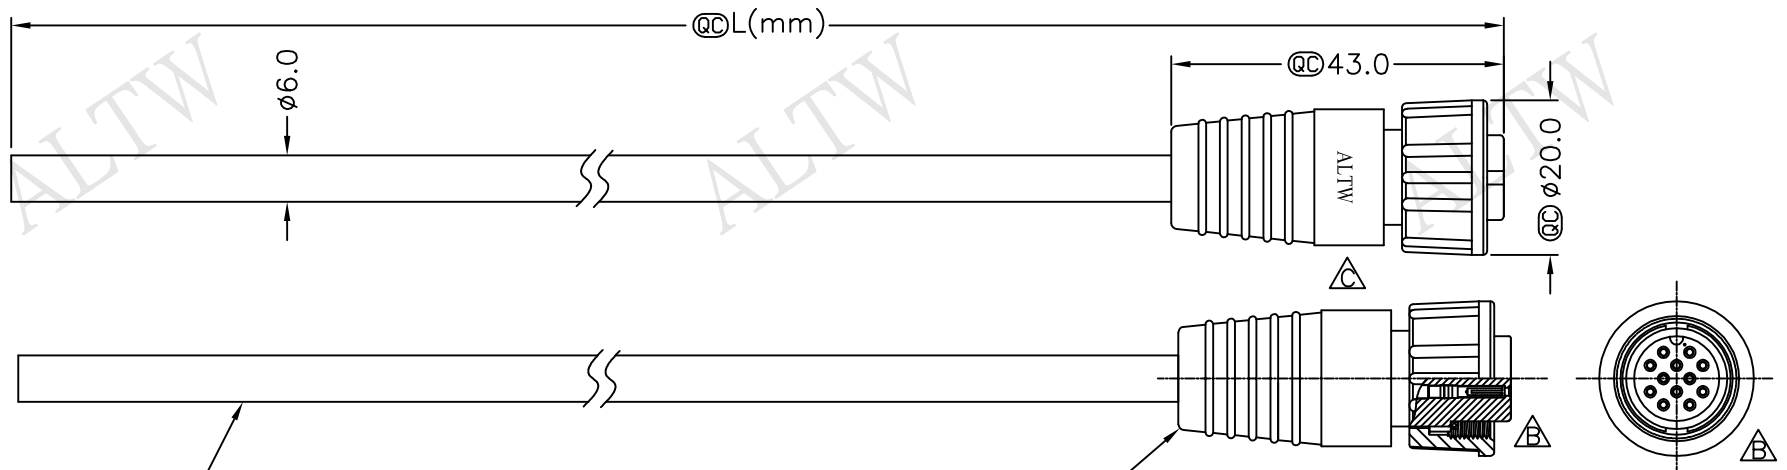


Cable ②

BU-12BFFM-SL7000 ①
Color: Black

BU-12BFFM-SL7AXX
XX:01~99Meter
01:01Meter
02:02Meters
⋮
99:99Meters
Cable Length(L):01~99Meters



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 26AWG*12C+Drain+Al/My, PVC Jacket UV Resistant, OD=6.0, Black
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

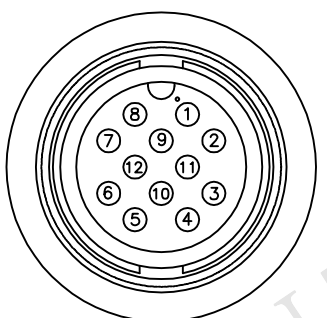

Pin Assignments Front View

12	Light Green	淺綠
11	Purple	紫
10	Orange	橙
9	Black	黑
8	Red	紅
7	Pink	粉紅
6	Gray	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	Pin Out

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard Cable Screw 12Pin F Conn F Pin	
SCALE	Free	SHEET 1 OF 1
REV.	C	SIZE A4 @C :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Ruru	2015/12/14
BU-12BFFM-SL7AXX	Rita	2015/12/14
ALTW	Lisa	2015/12/14

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.