




REV	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1620178~181	2016/01/14	Ruru	Change Logo

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

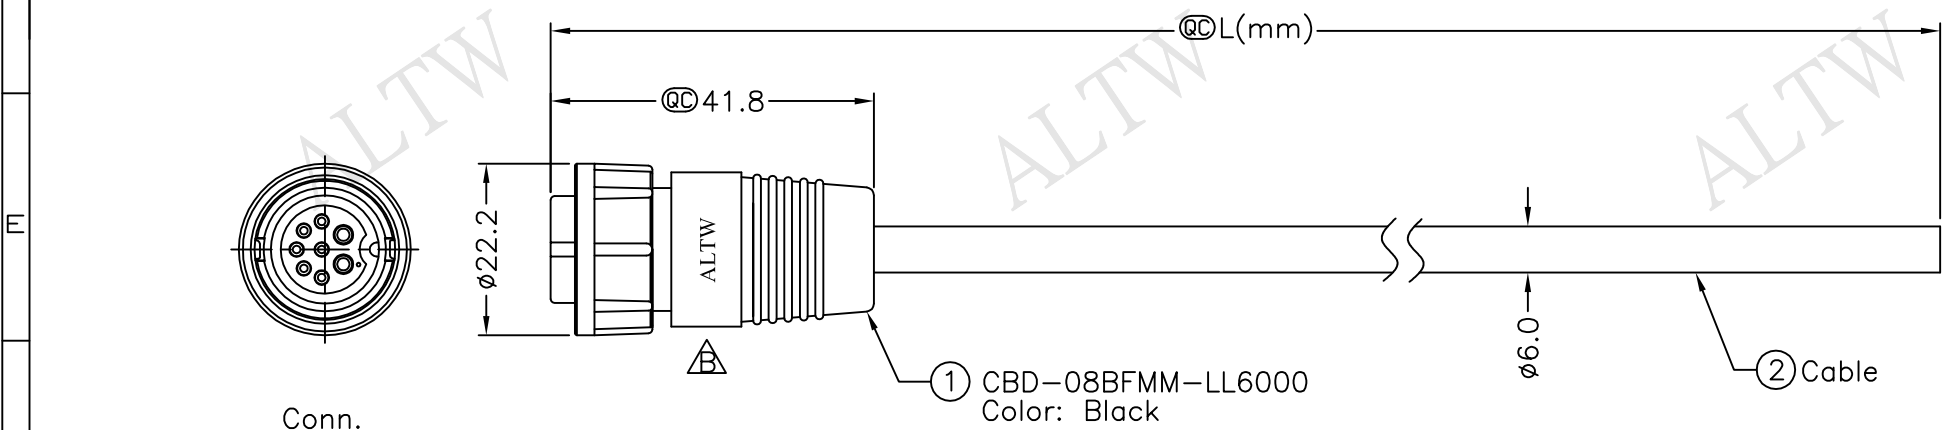


CBD-08BFMM-LL6AXX  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 ...  
 99:99Meters

Cable Length(L):01~99Meters

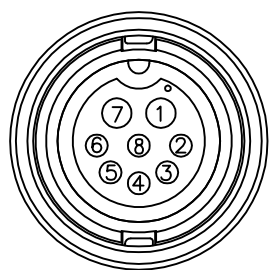

8	Purple	24
7	Blue	20
6	Yellow	24
5	Orange	24
4	Red	24
3	Brown	24
2	Black	24
1	Green	20
Conn.	Wire Color	AWG
	Pin Out	



- Note:
- \* @C Important Dimensions To Check.
  - \* Waterproof Rate: IP66
  - \* Housing: Nylon+GF, Black
  - \* Male Pin: Copper Alloy, Gold Plated
  - \* O-Ring: EPDM, Black
  - \* Nut: Nylon+GF, Black
  - \* Cable: UL2464 (20AWG\*2C+24AWG\*6C)+Drain+Al/My, PVC Jacket UV Resistant(+105°C~-20°C), OD=6.0, Black
  - \* Cable Length Tolerance: 01M: ±40mm  
 02M~05M: ±60mm  
 06M~10M: ±100mm  
 11M~30M: ±200mm  
 31M~99M: ±500mm

UNIT:mm		TITLE	Middle,Cable Lock 8Pin F Conn M Pin		ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5 mm	SCALE	Free	SHEET 1 OF 1	DWG NO	CHECKED BY	DATE
		REV.	B	SIZE	A4	APPROVED BY	DATE
					QC :Inspection Item	Lisa	2016/01/14
Amphenol LTW			安費諾亮泰企業股份有限公司		CUSTOMER	ALTW	2016/01/14
						Ruru	2016/01/14
						Rita	2016/01/14
							2016/01/14