




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2012/08/06	Jason Jiang	Change Rev.01 To Rev.A
B	LEN1520086~89	2015/01/29	Ruru	Change Logo

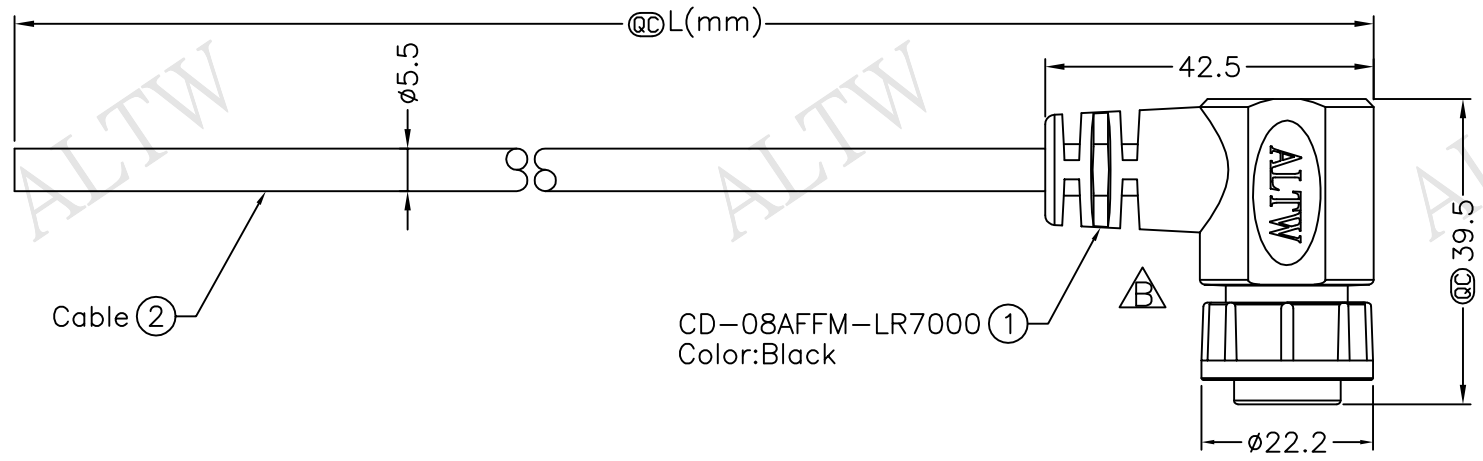

CD-08AFFM-LR7AXX  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 ...  
 99:99Meters  
 Cable Length(L):01~99Meters

- Note:
- \* @Important Dimension To Check.
  - \* Waterproof Rate: IP67.
  - \* Connector: Nylon+GF, Black.
  - \* Female Pin: Copper Alloy, Gold Plated.
  - \* Lock Nut: Nylon+GF, Black.
  - \* O-Ring: EPDM, Black.
  - \* Cable: UL2464 24AWG\*8C+Drain+Al/My, PVC Jacket UV Resistant, OD=5.5, Black.
  - \* Cable Length Tolerance: 01M:±40mm  
 02M~05M:±60mm  
 06M~10M:±100mm  
 11M~30M:±200mm  
 31M~99M:±500mm



Pin Assignments  
Front View

Green	綠	8
Yellow	黃	7
Orange	橙	6
Red	紅	5
Blue	藍	4
White	白	3
Brown	棕	2
Black	黑	1
Wire Color		Conn.
Pin Out		

UNIT:mm	
TOLERANCE	
±0.5mm	

TITLE		Middle	
Cable Lock 8P F Conn F Pin			
SCALE	Free	SHEET	1 OF 1
REV.	B	SIZE	A4
QC :Inspection Item			

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2015/01/29
DWG NO	CHECKED BY	DATE
CD-08AFFM-LR7AXX	Rita	2015/01/29
CUSTOMER	APPROVED BY	DATE
ALTW	Win	2015/01/29

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F  
E  
D  
C  
B  
A

1 2 3 4 5 6 7 8