




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1650615~618	2016/05/17	Ruru	Change Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

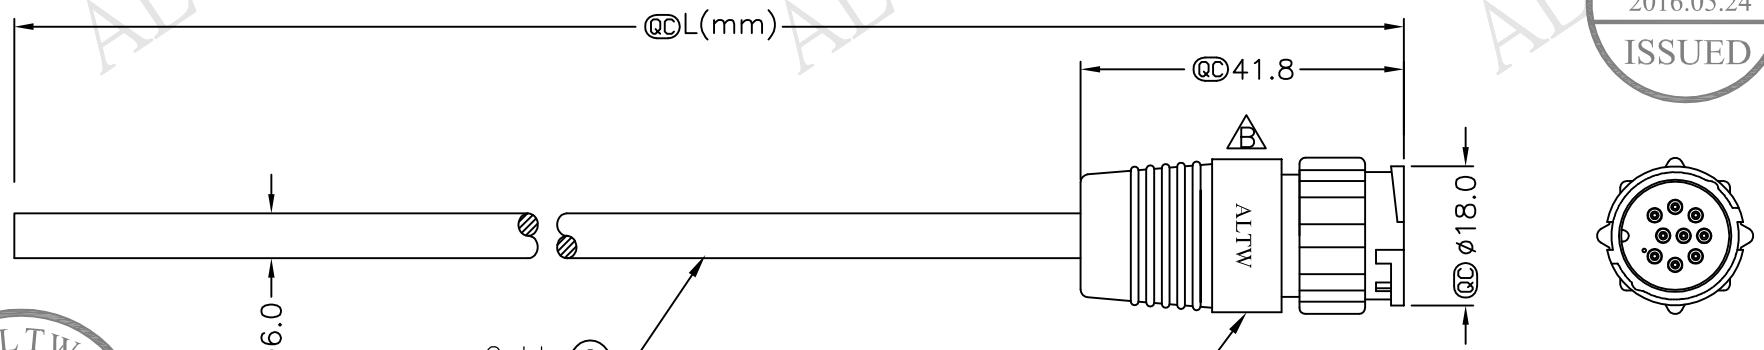

Cable ②

CD-09BMMM-LL6000 ①
Color: Black



Conn.


CD-09BMMM-LL6AXX

XX :01~99Meters
01 :01Meter
02 :02Meters
 :
 :
99 :99Meters

Cable Length(L):01~99Meters

Note:

- * @C Important Dimension To Check.
- * Waterproof Rate: IP66
- * Housing: Nylon+GF,Black
- * Pin: Copper Alloy,Gold Plated
- * Cable: UL2464 24AWG*9C+D+AL/My
Black,PVC Jacket UV Resistant, OD=6.0
- * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm



Pin Assignments
Front View

9	Black
8	Red
7	Pink
6	Grey
5	Yellow
4	Green
3	White
2	Blue
1	Brown
Conn.	Wire Color
	Pin Out

UNIT:mm	
TOLERANCE ±0.5 mm	

TITLE Middle, Cable Lock 9 Pin M Conn. M Pin	
SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4
QC :Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2016/05/17
DWG NO CD-09BMMM-LL6AXX	CHECKED BY Rita	DATE 2016/05/17
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/05/17