

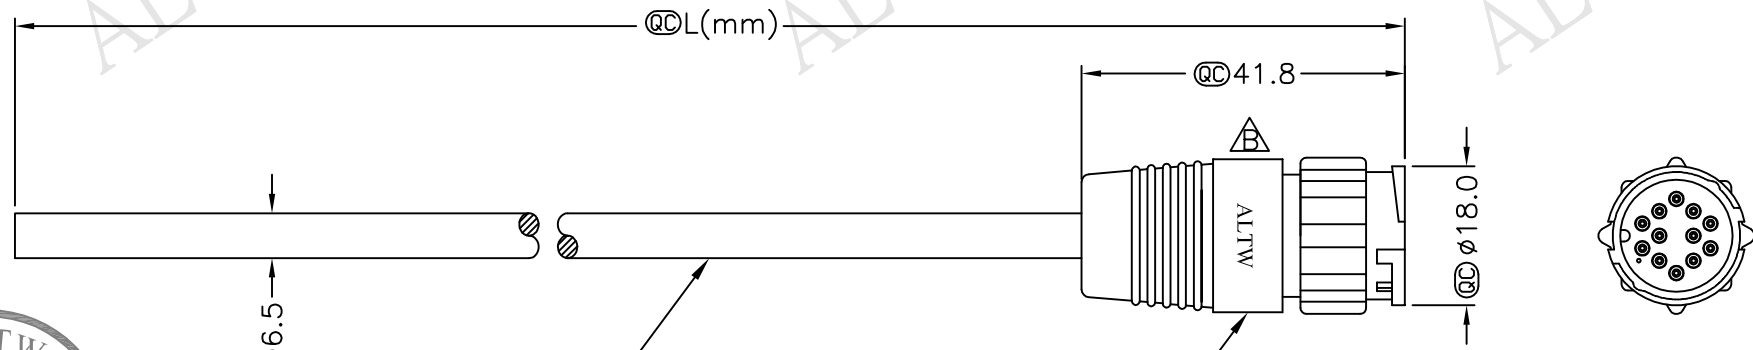


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1650726~729	2016/05/18	Ruru	Change Logo & Note




Cable ② → CD-10BMMM-LL6000 ① →  
Color: Black

CD-10BMMM-LL6AXX

XX :01~99Meters  
01 :01Meter  
02 :02Meters  
 :  
 :  
99 :99Meters

Cable Length(L):01~99Meters

- Note:
- \* @C Important Dimension To Check.
  - \* Waterproof Rate: IP66
  - \* Housing: Nylon+GF,Black
  - \* Pin: Copper Alloy,Gold Plated
  - \* Cable: UL2464 24AWG\*10C+D+AL/My Black,PVC Jacket UV Resistant, OD=6.5
  - \* Cable Length Tolerance: 01M: ±40mm  
 02M~05M: ±60mm  
 06M~10M: ±100mm  
 11M~30M: ±200mm  
 31M~99M: ±500mm



Pin Assignments  
Front View

10	Orange	橘
9	Black	黑
8	Red	紅
7	Pink	粉紅
6	Grey	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	Pin Out

UNIT:mm		TITLE Middle, Cable Lock 10 Pin M Conn. M Pin
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4	@C :Inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2016/05/18
DWG NO CD-10BMMM-LL6AXX	CHECKED BY Rita	DATE 2016/05/18
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/05/18

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F  
E  
D  
C  
B  
A

1 2 3 4 5 6 7 8