



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0134~137	2010/11/25	Ivan	Change 前導角View
C	LEN15C0535~539	2015/12/16	Ruru	Change Logo

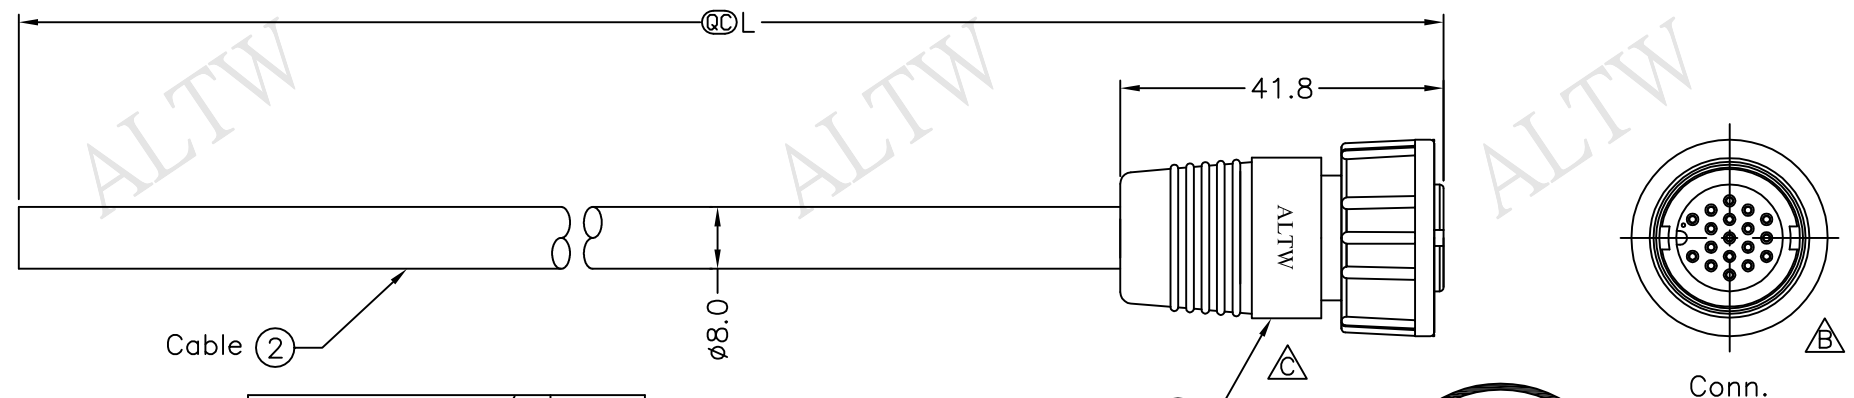



Blue/White	藍/白	18
Light Green	淺綠	17
Green/White	綠/白	16
Brown/White	棕/白	15
Orange/White	橙/白	14
Black/White	黑/白	13
Red/White	紅/白	12
Orange	橙	11
Pink	粉紅	10
Gray	灰	9
Purple	紫	8
Yellow	黃	7
Green	綠	6
White	白	5
Brown	棕	4
Blue	藍	3
Black	黑	2
Red	紅	1
Wire Color		Conn.
Pin Out		

CU-18BFFM-SL6000 ①
Color: Black

CU-18BFFM-SL6AXX
↑
XX:01~99Meters
01:01Meter
02:02Meters
⋮
99:99Meters
Cable Length(L):01~99Meters



- Note:
- * @Important Dimension.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF,Black
 - * Female Pin: Copper Alloy,Gold Plated
 - * O-Ring: EPDM,Black
 - * Screw Nut: Nylon+GF,Black
 - * Cable: UL2464 24AWG*18C+Drain+AL/My PVC Jacket,UV Resistant,OD=8.0mm,Black
 - * Cable Length Tolerance:01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm



Pin Assignments
Front View

UNIT:mm TOLERANCE ±0.5mm	TITLE Middle Cable Screw 18Pin F Conn F Pin		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ruru	DATE 2015/12/16
	SCALE Free	SHEET 1 OF 1		DWG NO CU-18BFFM-SL6AXX	CHECKED BY Rita	DATE 2015/12/16
REV. C	SIZE A4	@ :Inspection Item	CUSTOMER ALTW	APPROVED BY Lisa	DATE 2015/12/16	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

A B C D E F

1 2 3 4 5 6 7 8