



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-050120~23	2009/12/28	Li Xiu Zhi	Change View
C	LEN15C0560~563	2015/12/17	Ruru	Change Logo

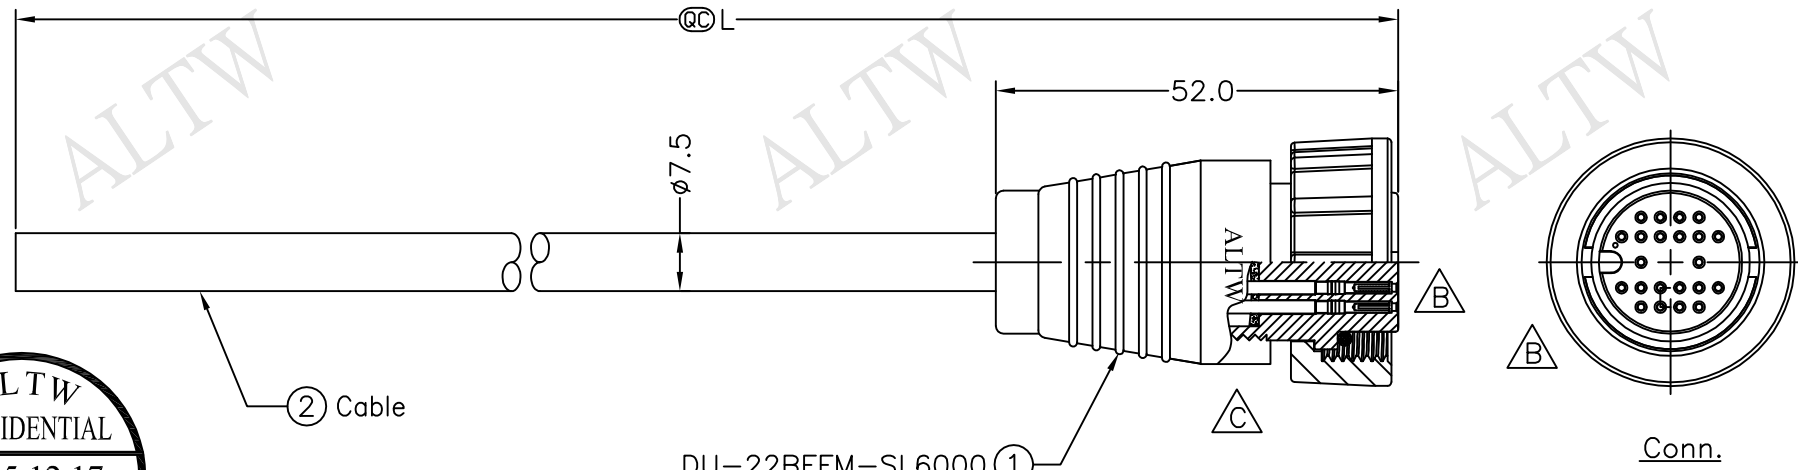


DU-22BFFM-SL6000 ①
Color:Black
DU-22BFFM-SL6AXX

XX:01~99Meter
01:01Meter
02:02Meters
:
:
:
99:99Meters


Cable Length(L):01~99Meters

- Note:
- * @@Important Dimensions To Check.
 - * Waterproof Rate: IP66
 - * Housing:Nylon+GF ,Black
 - * Pin: Copper Alloy,Gold Plated
 - * O-Ring:EPDM,Black
 - * Screw Nut:Nylon+GF,Black
 - * Cable:UL2464 26AWG*22C+Drain+AL.Mylar PVC Jacket UV Resistant, OD=7.5mm,Black
 - * Cable Length Tolerance:01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

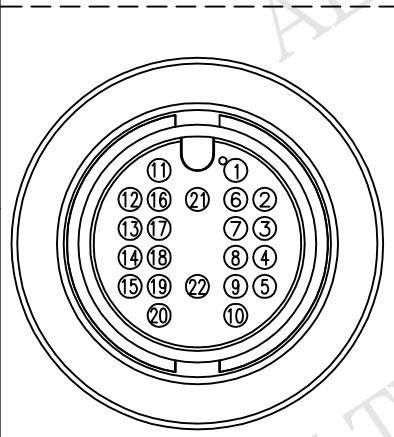

Pin Assignments
Front View

Pink 粉紅	11	Yellow/Black 黃/黑	22
White 白	10	Orange/Black 橙/黑	21
Gray 灰	9	Red/Black 紅/黑	20
Purple 紫	8	Purple/White 紫/白	19
Blue 藍	7	Blue/White 藍/白	18
Green 綠	6	Green/White 綠/白	17
Yellow 黃	5	Orange/White 橙/白	16
Orange 橙	4	Red/White 紅/白	15
Red 紅	3	Brown/White 棕/白	14
Brown 棕	2	Black/White 黑/白	13
Black 黑	1	Light Green 淺綠	12
Wire Color	Conn.	Wire Color	Conn.
Pin Out		Pin Out	



UNIT:mm

TOLERANCE ±0.5mm

TITLE Large,Cable Screw 22Pin F Conn F Pin

SCALE Free SHEET 1 OF 1

REV. C SIZE A4 @@ :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO

DWG NO DU-22BFFM-SL6AXX

CUSTOMER ALTW

DRAWN BY Ruru

CHECKED BY Rita

APPROVED BY Lisa

DATE 2015/12/17

DATE 2015/12/17

DATE 2015/12/17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

1 2 3 4 5 6 7 8

F

E

D

C

B

A

1 2 3 4 5 6 7 8

8 FMW10702-01-01A2