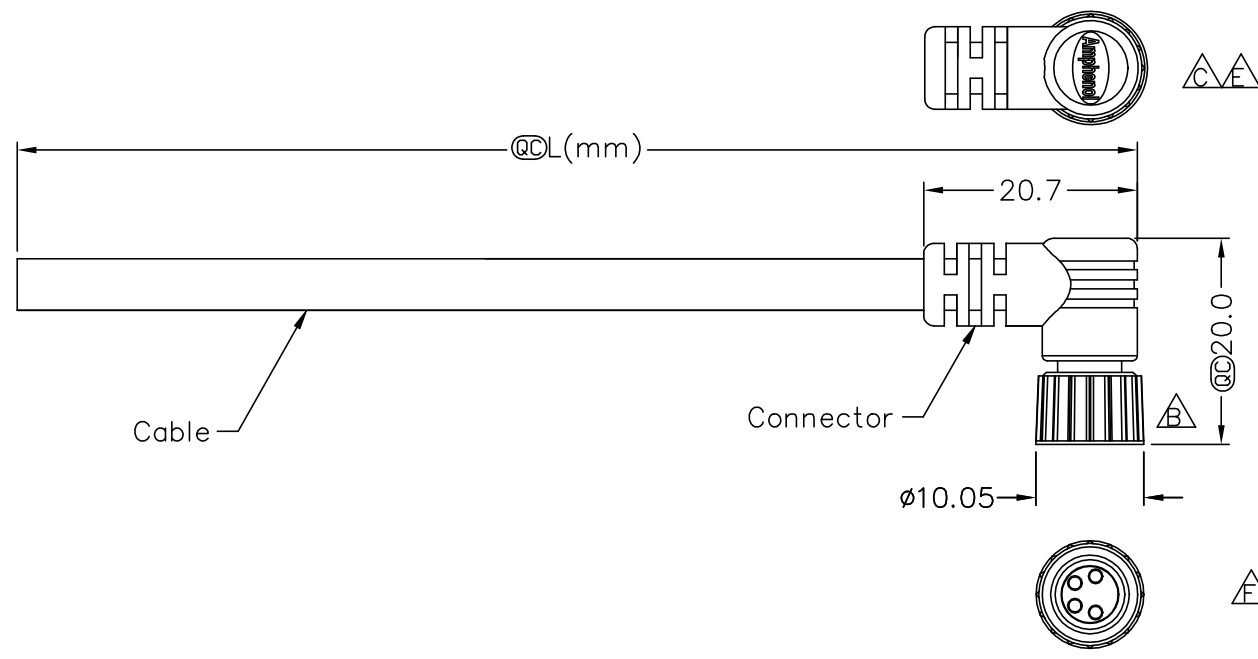


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	LEN1630158~161	2016/03/07	Vicky	Update Logo
F	C210636	2021/04/23	Vicky	△ X8
G	C221881	2022/12/07	Vicky	△ X1



- △ Note:
- \* RoHS Compliant
  - \* @ Important dimension
  - △ \* Waterproof rate: IP67, mated Connector
  - Housing: Thermoplastic, Black
  - Pin: Copper alloy, Gold plated
  - Nut: Metal
  - O-Ring: Rubber, Green
  - Outer mold: Thermoplastic, Black
  - \* Cable: UL2464, PVC Jacket, Black
  - △ \* Cable length tolerance:
 

1M: +50/-0 mm
1M < L ≤ 3M: +100/-0 mm
3M < L ≤ 5M: +150/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

UNIT: mm	TITLE O SEN, M8 CABLE W/SR, F, F, MOLDING		 <b>Amphenol LTW</b> 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY	DATE
TOLERANCE	SCALE	SHEET		DWG. NO	CHECKED BY	DATE
±0.5 mm	Free	1 OF 2		8-XXAFFM-SR7AXX	Rita	2016/03/07
	REV. G	SIZE A4	@ : Inspection Item	CUSTOMER	APPROVED BY	DATE
				ALTW	Lisa	2016/03/07

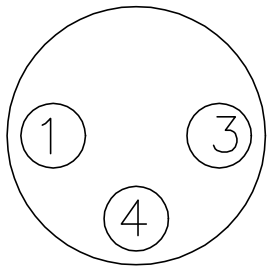
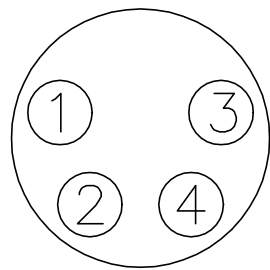
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

4P	5.0	22	8-04AFFM-SR7AXX
3P			8-03AFFM-SR7AXX
△ Contacts	Cable OD	AWG	Item No.

△ 8-XXAFFM-SR7AXX

XX: No. Of Pin

↑  
 XX: 01~99Meters  
01: 01Meter  
02: 02Meters  
 :  
 :  
99: 99Meters  
 Cable Length(L): 01~99Meters

Pin Out	4	Black	黑	4	Black	黑
	3	Blue	藍	3	Blue	藍
	1	Brown	棕	2	White	白
				1	Brown	棕
	Pin #	Wire		Pin #	Wire	
Conn.	 <p>△ 3P</p>			 <p>△ 4P</p>		

△ Pin Assignments Front View

UNIT: mm	TITLE	
TOLERANCE ±0.5 mm	O SEN, M8 △△	
	CABLE W/SR, F, F, MOLDING	
	SCALE Free	SHEET 2 OF 2
REV. G	SIZE A4	QC: Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2016/03/07
DWG. NO △ 8-XXAFFM-SR7AXX	CHECKED BY Rita	DATE 2016/03/07
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/03/07