


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720001-002	2017/01/24	Vicky	Update Note
C	C210625	2021/04/22	Vicky	$\triangle C$ X5
D	C221871	2022/12/02	Vicky	$\triangle D$ X1

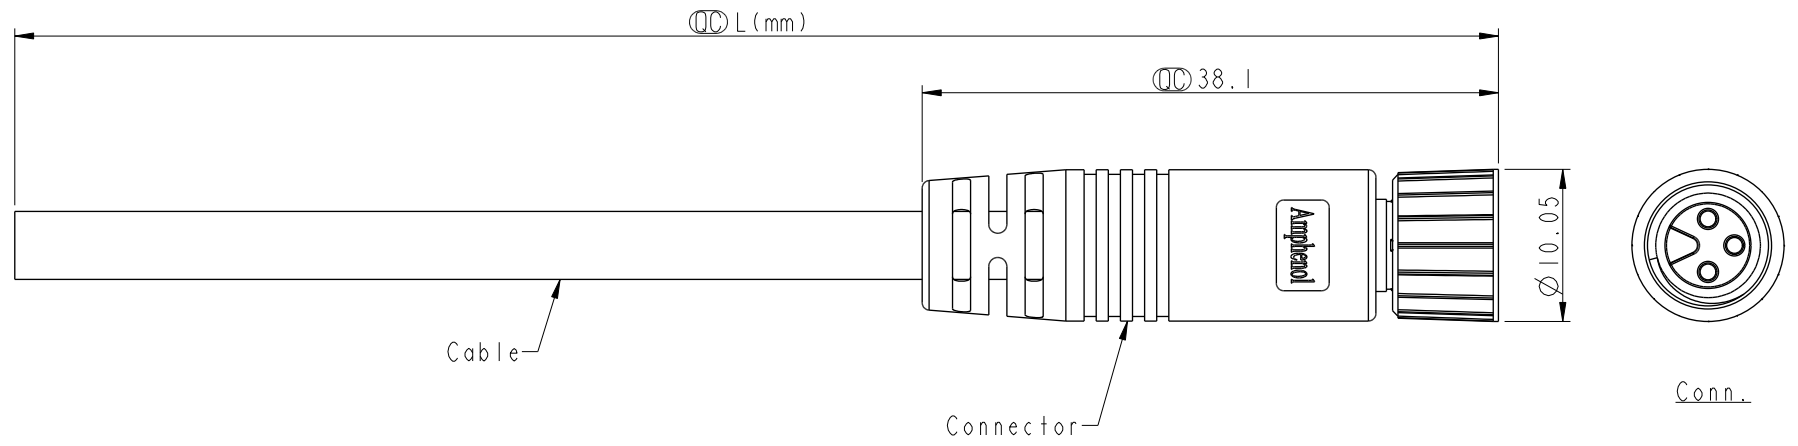


$\triangle C$   
8A-XXAFFM-SL7BXX  
XX: No. Of Pin

XX: 01~99Meters  
01: 01Meter  
02: 02Meters  
:  
99: 99Meters

- $\triangle C$  Note:
- \* RoHS Compliant
  - \*  $\varnothing$  Important dimension
  - $\triangle D$  \* Waterproof rate: IP67, mated Connector
  - Housing: Thermoplastic, Black
  - Pin: Copper alloy, Gold plated
  - O-Ring: Rubber, Green
  - $\triangle B$  Nut: Metal
  - Outer mold: Thermoplastic, Black
  - \* Cable: 22AWG\*3C+Talcum, PU Jacket, OD4.5, Black
  - \* Cable length tolerance: 1M: +50/-0 mm
  - 1M < L ≤ 3M: +100/-0 mm
  - 3M < L ≤ 5M: +150/-0 mm
  - 5M < L ≤ 10M: ±100 mm
  - 10M < L ≤ 20M: ±200 mm
  - 20M < L ≤ 30M: ±300 mm
  - 30M < L ≤ 99M: ±500 mm

Pin Out	Wire	Wire
4	Black	黑
3	Blue	藍
1	Brown	棕
Pin #	Wire	

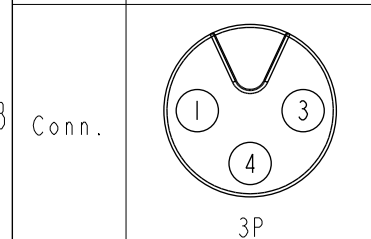

$\triangle C$  Pin Assignments Front View

UNIT:mm	$\varnothing$	$\varnothing$
TOLERANCE	±0.5 mm	

TITLE O SEN, M8 W/KEY CABLE W/SR, F, F, MOLDING			$\triangle C$
SCALE 2:1	SIZE A4	SHEET 1 OF 1	
REV. D	WC-REV. A.1	$\varnothing$ : Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2017-01-24
DWG NO $\triangle C$ 8A-XXAFFM-SL7BXX	CHECKED BY Rita	DATE 2017-01-24
CUSTOMER ALTW	APPROVED BY Max	DATE 2017-01-24