




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C220554	2022/04/12	Vicky	$\triangle B$ X8
C	C230186	2023/02/13	Vicky	$\triangle C$ XI

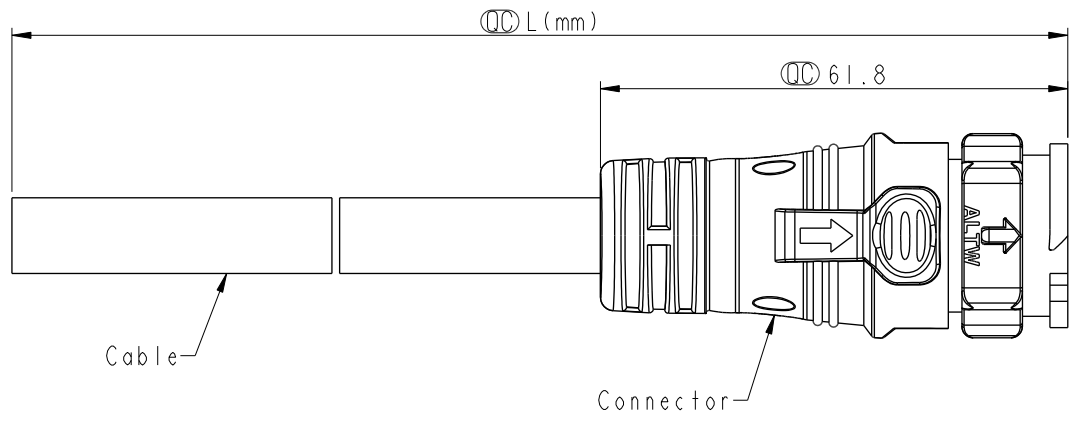

Conn.

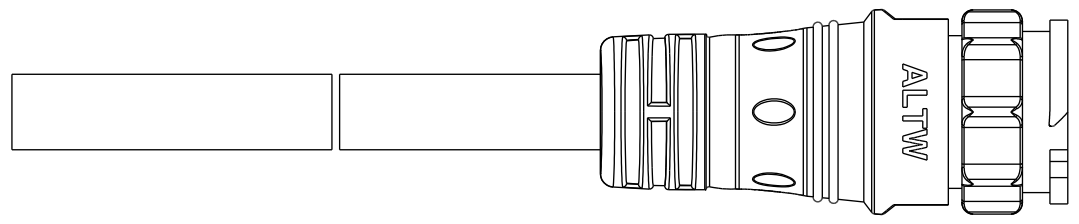

- $\triangle B$
Note:
- * RoHS Compliant
 - * $\text{\textcircled{L}}$ Important dimension
 - $\triangle C$ * Waterproof rate: IP68, mated 1m/24h
 - * Connector
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
Outer mold: Thermoplastic, Black
 - * Cable: UL21388, PVC Jacket, Black
 - * Cable length tolerance: 1M: +50/-0 mm
- | | |
|----------------|------------|
| 1M < L ≤ 3M: | +100/-0 mm |
| 3M < L ≤ 5M: | +150/-0 mm |
| 5M < L ≤ 10M: | ±100 mm |
| 10M < L ≤ 20M: | ±200 mm |
| 20M < L ≤ 30M: | ±300 mm |
| 30M < L ≤ 99M: | ±500 mm |

UNIT: mm

TOLERANCE

±0.5mm

TITLE XLOK, D-5A, CABLE W/SR M, M, MOLDING, PUSH LOCK $\triangle B$		
SCALE 1:1	SIZE A4	SHEET 1 OF 2
REV. C	WC-REV. A.2	$\text{\textcircled{L}}$: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Micky	DATE 2014-12-24
DWG NO. DD-XXAMMM-QL8DXX $\triangle B$	CHECKED BY Spring	DATE 2014-12-24
CUSTOMER ALTW	APPROVED BY Kevin	DATE 2014-12-24

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.


F							18P	10.0	20	DD-18AMMM-QL8DXX
							14P	8.5		DD-14AMMM-QL8DXX
							Contacts	Cable OD	AWG	Item No.

D Pin Out	14	Brown/White	棕/白	18	Blue/White	藍/白
	13	Black/White	黑/白	17	Green/White	綠/白
	12	Light Green	淡綠	16	Orange/White	橙/白
	11	Pink	粉紅	15	Red/White	紅/白
	10	White	白	14	Brown/White	棕/白
	9	Gray	灰	13	Black/White	黑/白
	8	Purple	紫	12	Light Green	淡綠
	7	Blue	藍	11	Pink	粉紅
	6	Green	綠	10	White	白
	5	Yellow	黃	9	Gray	灰
	4	Orange	橙	8	Purple	紫
	3	Red	紅	7	Blue	藍
	2	Brown	棕	6	Green	綠
	1	Black	黑	5	Yellow	黃
				4	Orange	橙
				3	Red	紅
				2	Brown	棕
				1	Black	黑
	Pin #	Wire	Pin #	Wire		


△B DD-XXAMMM-QL8DXX

XX: No. Of Pin

XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 :
 99: 99Meters

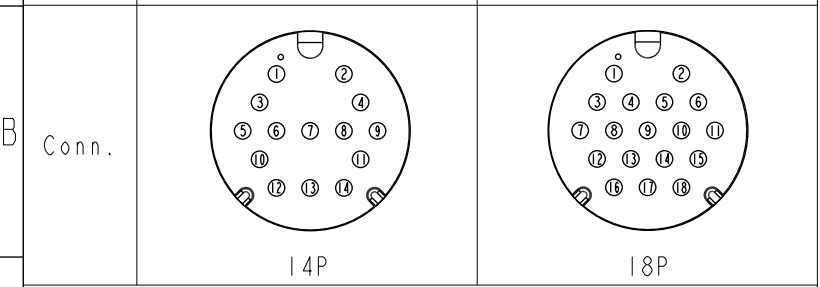

△B Pin Assignments Front View

UNIT:mm		TITLE	XLOK, D-5A, CABLE W/SR M, M, MOLDING, PUSH LOCK	
TOLERANCE	±0.5mm	SCALE	1:1	SIZE A4
		REV.	C	WC-REV. A.2
				SHEET 2 OF 2
				QC: Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
ALTW	Micky Spring Kevin	2014-12-24 2014-12-24 2014-12-24